





## TL432 Series

- To start up the ignition system of gas, oil or air
- Available up to 20kVpp
- Ambient Temperature 70°C
- No-Load operation up to 30 seconds maximum

**NEW**

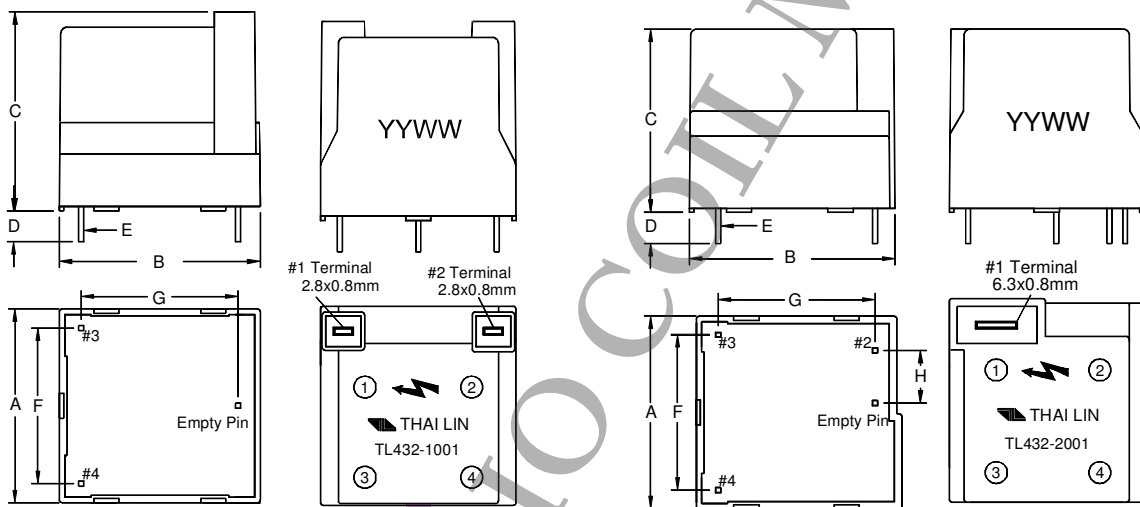

Product Series	Dimension (mm)								Weight (g)
	A	B	C	D	E	F	G	H	
TL432-1	31.0	32.0	32.0	4.5	SQ0.8	25.0	25.0	--	18
TL432-2	31.0	32.8	29.5	4.5	SQ0.8	25.0	25.0	8.5	18
<b>Tolerance</b>	±0.5	±0.5	±0.5	±1.0	±0.1	±0.5	±0.5	±0.3	approx.

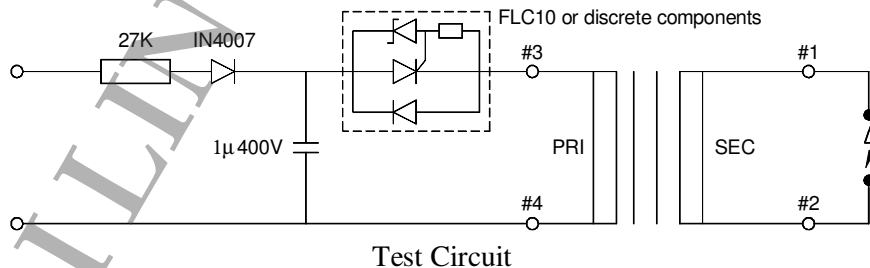

Part Number	Primary Inductance (µH, ±20%)	Secondary Inductance (mH, ±20%)	Primary DC Resistance (mΩ, ±15%)	Secondary DC Resistance (Ω, ±15%)	Turns Ratio (Pri : Sec)	Secondary Voltage @ load 30pF	Spark Gap (mm)
TL432-1001	25	320	75	800	1 : 120	20kV (typ.)	4 – 8
TL432-2001	25	320	75	800	1 : 120	20kV (typ.)	4 – 8